



Motorola Moto G 2nd Generation LCD Screen Replacement

Written By: idea



INTRODUCTION

[video: <https://www.youtube.com/watch?v=cohYFqRjr14>]



TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Spudger](#) (1)
- [Heat Gun](#) (1)
- [iFixit Opening Picks set of 6](#) (1)



PARTS:

- [Moto G2 LCD screen](#) (1)

Step 1 — LCD Screen





- Remove back cover, SIM card, and SD card (if applicable)

Step 2



- Remove back frame. Be sure to remember where the screws go; they are different sizes

Step 3

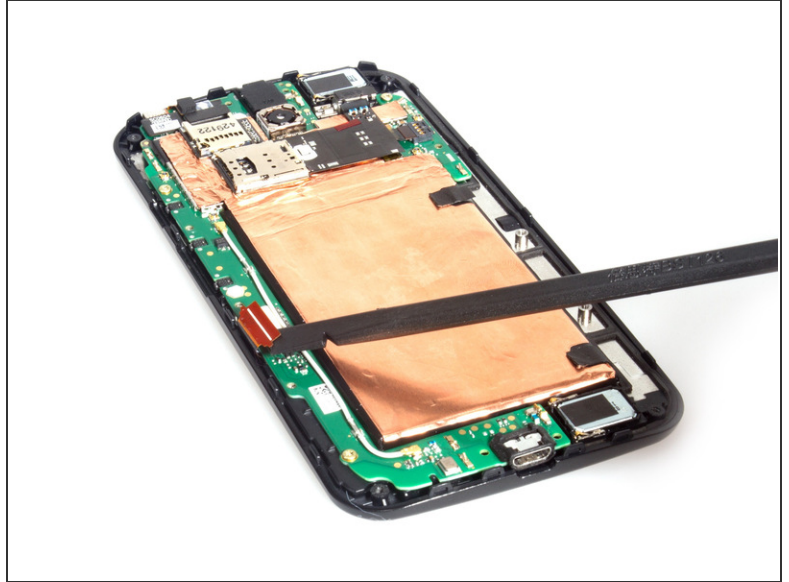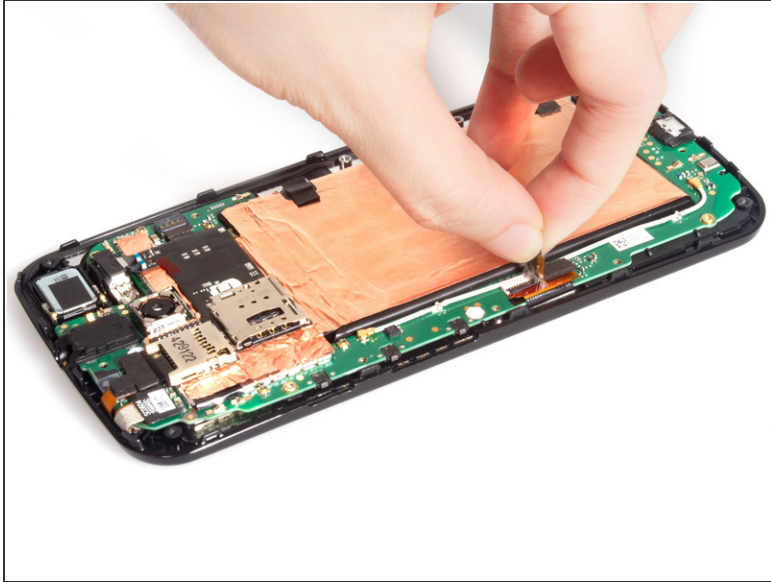

- Release LCD screen connector.

Step 4



- Remove the screen.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 07:21:54 AM.